Extension pipe (A)

Application

For connection to components with thin wall thickness such as sleeves with oil connections. Normally used in combination with high pressure pipes such as 227957 A.

Technical data	
Designation	227965
Weight	0,20 kg (0.44 lb)
Max. pressure	300 MPa (43,500 psi)



M4 - Extension pipe with connection nipple (B)

Application

Used to extend a high pressure pipe with a G 1/4 nipple (e.g. 227957 A) when the connection hole has an M4 thread. The extension pipe and connection nipple may be ordered separately. When ordering a set, both designations should be quoted.

Technical data	
Designation (extension pipe)	234064
Designation (connection nipple)	234063
Max. pressure	50 MPa (7.250 psi)
Weight (both components)	0,075 kg (0.17 lb)


M6 - Extension pipe with connection nipple (C)

Application

Used to extend a high pressure pipe with a G 1/4 nipple (e.g. 227957 A) when the connection hole has an M6 thread.

The extension pipe and connection nipple may be ordered separately. When ordering a set, both designations should be quoted.

Technical data	
Designation (extension pipe)	1077453
Designation (connection nipple)	1077454
Maximum pressure	200 MPa (29,000 psi)
Total weight both components	0,105 kg (0.23 lb)

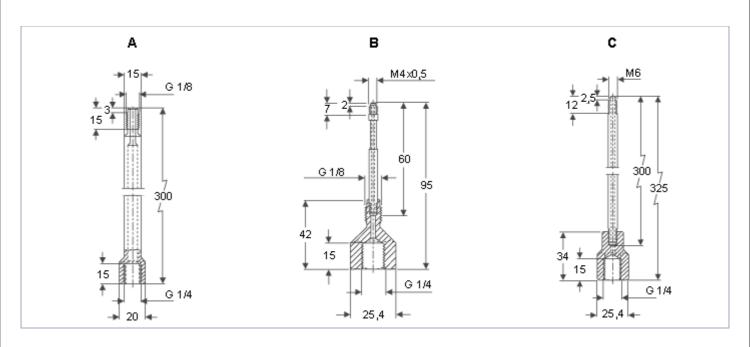

ЗАО «БЕРГ АБ», (495) 727-22-72, promshop-biz@ya.ru, www.promshop.biz

© SKF Maintenance Products Date of issue: 2002-05-01